


**AXIAL CABLE OUTLET - AW/5/S(H)**

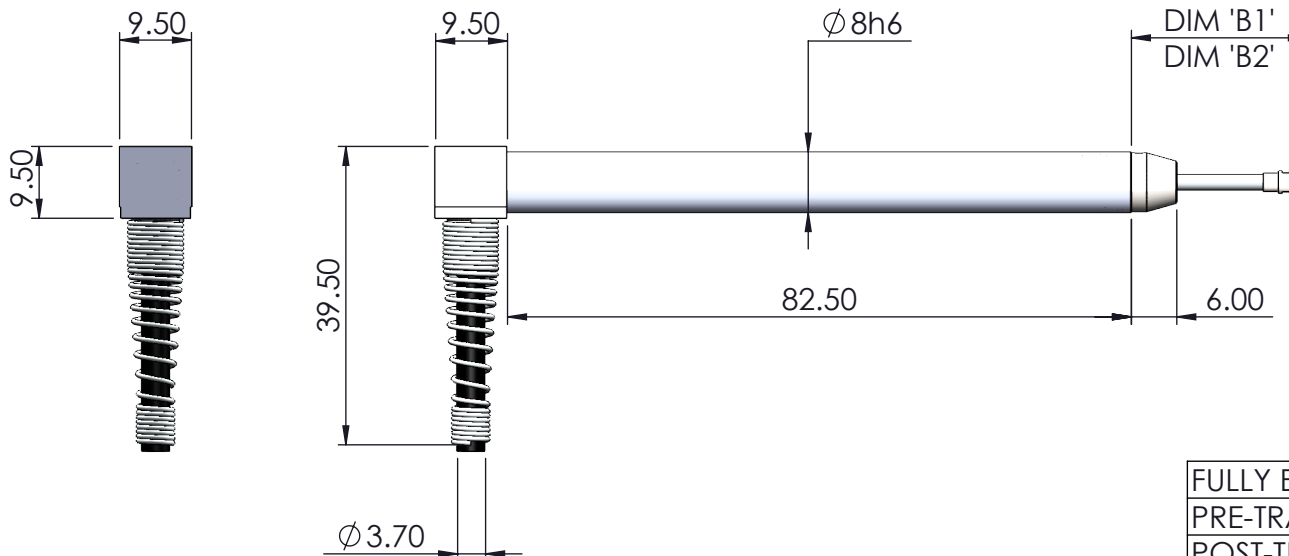

**RADIAL CABLE OUTLET - AWR/5/S(H)**

FULLY EXTENDED DIM 'B1'	23.25
PRE-TRAVEL	0.30
POST-TRAVEL	0.70
FULLY RETRACTED DIM 'B2'	12.25